




RAS REINHARDT MASCHINENBAU GMBH

Production Program

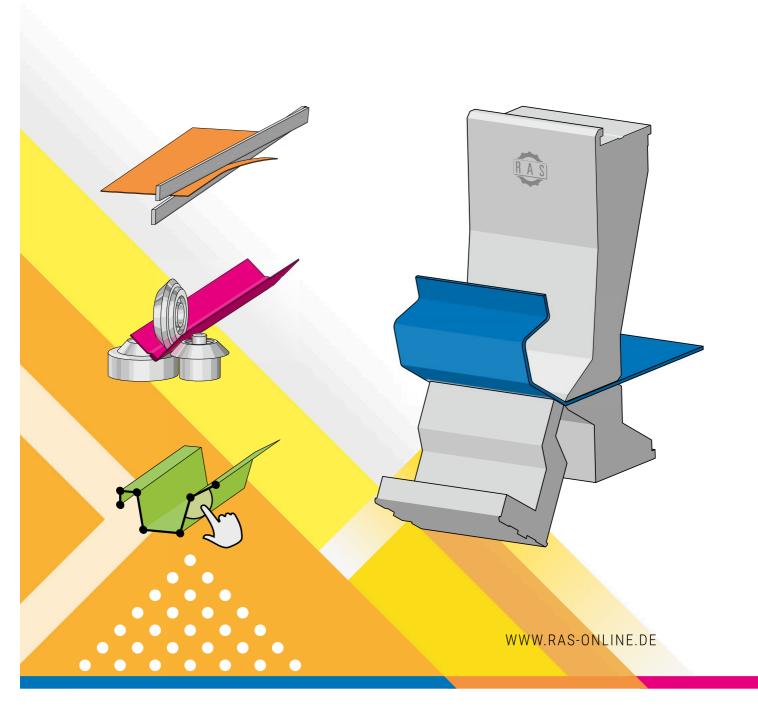

Cutting

SWING BEAM SHEARS


SMARTcut



RAS has added a TouchScreen control to the SMARTcut swing beam shear, thus giving optimum clearness on the monitor. With its 3100 x 2 mm and 2540 x 2.5 mm the RAS SMARTcut models combines all characteristics of a high performance, premium shear.




The pop-up hold-down (right) prevents thin and very sensitive sheets from being lifted and bent during the upstroke of the swing beam.













The foot lever switches the parts chute direction.

With a rotation wheel, the cutting gap eccentric can be quickly and easily adjusted to sheet thickness and material type



SMARTcut	RAS 52.25	RAS 52.30
CUTTING LENGTH MAX.	2540 mm	3100 mm
SHEET THICKNESS MAX.	2.5 mm	2.0 mm
GALIGING DEPTH	5-750 mm	5-750 mm





Bending

Cutting

Forming

Software

RAS Reinhardt Maschinenbau GmbH Richard-Wagner-Straße 4-10 71065 Sindelfingen

Fon: + 49-7031-863-0 info@ras-online.de